

D

C

B

A



康霸子
KANGBAZ

RoHS

● FOR KB4602 SERIES HOUSING

● SPECIFICATIONS

VOLTAGE RATING: 250 VAC RMS.

CURRENT RATING: 3 AMP.

DIELECTRIC WITHSTANDING VOLTAGE:

AC 250V FOR 1 MINUTE.

INSULATION RESISTANCE: 500 MΩ.

● ENVIRONMENTAL

TEMPERATURE RANGE: -40°C~+105°C.

PART NO.

● KB4611 - 30K - 0T(0G) - F

SERIES NO.




FEMALE.

30K/REEL.

0T:TIN PLATED.

0G:GOLD PLATED.

OTHER PLATINGS ON REQUEST.

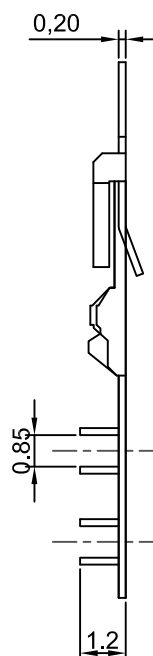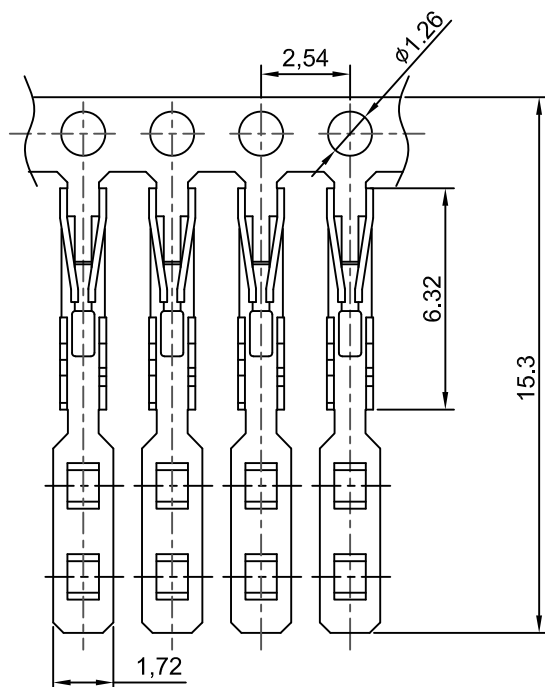

TOLERANCE
RANGE/公差範圍

RAWN/繪圖

DATE/日期
2019.05.24

CHECK BY/審查

DATE/日期
2019.05.24

STANDARD/一般公差 ±0.2

APPROVED BY/核准

DATE/日期
2019.05.24

PACKAGE/包裝

30,000 PCS / REEL



康霸子
KANGBAZ

2.54mm PITCH FFC/FPC CONNECTOR

PART NO./料號

KB4611-30K-0T(0G)-F

UNIT/單位
MM

MATERIAL/材質
PHOSPHOR BRONZE

ANGLE OF VIEW/視角

SHEET/頁碼
1 OF 1

REV/版本
A