

D

C

B

A



康霸子
KANGBAZ

RoHS

● FOR KB4606 SERIES HOUSING

● SPECIFICATIONS

VOLTAGE RATING: 250 VAC RMS.

CURRENT RATING: 3 AMP.

DIELECTRIC WITHSTANDING VOLTAGE:

AC 250V FOR 1 MINUTE.

INSULATION RESISTANCE: 500 MΩ.

● ENVIRONMENTAL

TEMPERATURE RANGE: -40°C~+105°C.

PART NO.

● KB4606P - 15K - 0T(0G) - FH

SERIES NO.

15K/REEL.


MOLD NO.

FEMALE.



0T:TIN PLATED

0G:GOLD PLATED.

OTHER PLATINGS ON REQUEST.

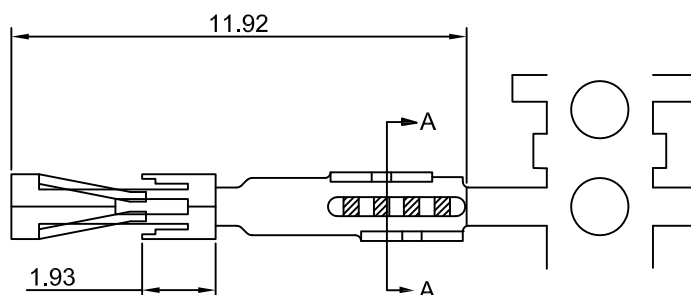

SECTION A-A

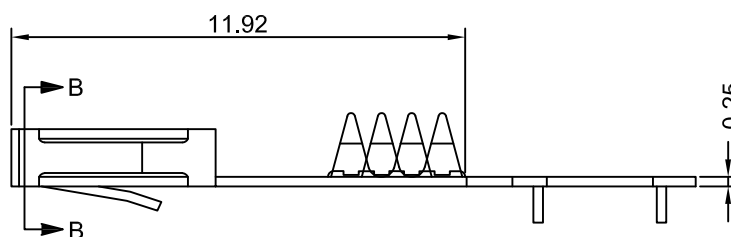

SECTION B-B

TOLERANCE
RANGE/公差範圍

STANDARD/一般公差 ±0.2

RAWN/繪圖

DATE/日期
2019.07.06

CHECK BY/審查

DATE/日期
2019.07.06

APPROVED BY/核准

DATE/日期
2019.07.06

PACKAGE/包裝

15,000 PCS / REEL



康霸子
KANGBAZ

5.08mm PITCH FFC/FPC CONNECTOR

PART NO./料號

KB4606P-30K-0T(0G)-FH

UNIT/單位
MM

MATERIAL/材質
PHOSPHOR BRONZE

ANGLE OF VIEW/視角

SHEET/頁碼
1 OF 1

REV/版本
A