

D

C

B

A



康霸子
KANGBAZ

RoHS

1



● Connector (2.54mm F.F.C. Connector)

● SPECIFICATIONS

VOLTAGE RATING: 15 V AC DC

CURRENT RATING: 2A.

Withsand voltage:1000V/min



Withsand humidity:30%~90%

TEMPERATURE RANGE: -60°C~+105°C.


● PART NO

KB4634 - XX T(G)H
 SERIES NO. MOLD NO.
 T:TIN PLATED.
 G:GOLD PLATED.
 CIRCUITS NUMBER 02 TO 32

2

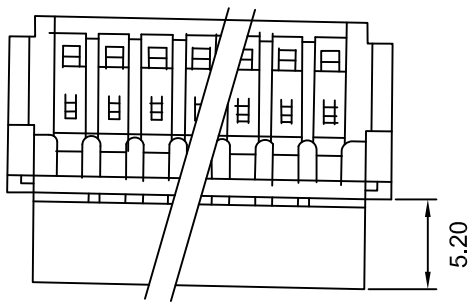

3

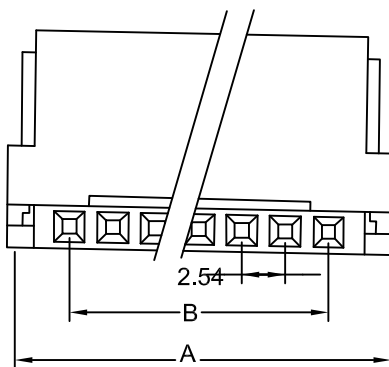

PIN NO	A	B	PIN NO	A	B
2	9.91	2.54	18	50.55	43.18
3	12.45	5.08	19	53.09	45.72
4	14.99	7.62	20	55.63	48.26
5	17.53	10.16	21	58.17	50.80
6	20.07	12.70	22	60.71	53.34
7	22.61	15.24	23	63.25	55.88
8	25.15	17.78	24	65.79	58.42
9	27.69	20.32	25	68.33	60.96
10	30.23	22.86	26	70.87	63.50
11	32.77	25.40	27	73.41	66.04
12	35.31	27.94	28	75.95	68.58
13	37.85	30.48	29	78.49	71.12
14	40.39	33.02	30	81.03	73.66
15	42.93	35.56	31	83.57	76.20
16	45.47	38.10	32	86.11	78.74
17	48.01	40.64			

4

TOLERANCE
RANGE/公差範圍

RAWN/繪圖

DATE/日期
2019.07.09



康霸子
KANGBAZ

2.54mm PITCH FFC/FPC CONNECTOR

STANDARD/一般公差 ±0.2

CHECK BY/審查

DATE/日期
2019.07.09

APPROVED BY/核准

DATE/日期
2019.07.09

PART NO./料號

KB4634-XXT(G)H

UNIT/單位
MM

PACKAGE/包裝

盒裝

MATERIAL/材質
NY66

ANGLE OF VIEW/視角



PIN NUMBER/針數
2-32

REV/版本
A