

D

C

B

A



康霸子
KANGBAZ

RoHS

● FOR 4603 SERIES HOUSING

● SPECIFICATIONS

VOLTAGE RATING: 250 VAC RMS

CURRENT RATING: 3 AMP

DIELECTRIC WITHSTANDING VOLTAGE:

AC 250V FOR 1 MINUTE

INSULATION RESISTANCE: 500 MΩ

● ENVIRONMENTAL

TEMPERATURE RANGE: -40°C~+105°C

● WIRE RANGE:AWG#24~#28

● PART NO.

KB4603 - 15K - 0T(0G/HG) - MS

SERIES NO.

15K/REEL

MOLD NO.

MALE


0T:TIN PLATED

0G:GOLD PLATED


HG:SELECTIVE GOLD PLATED

OTHER PLATINGS ON REQUEST






1



2



3

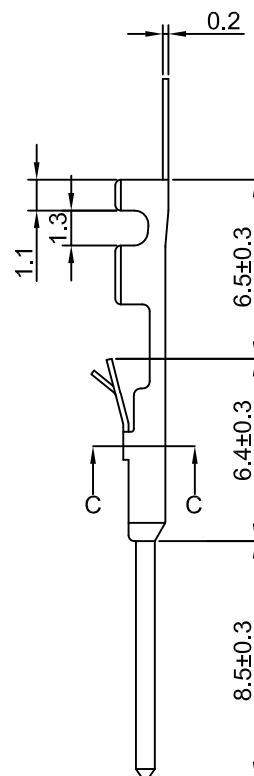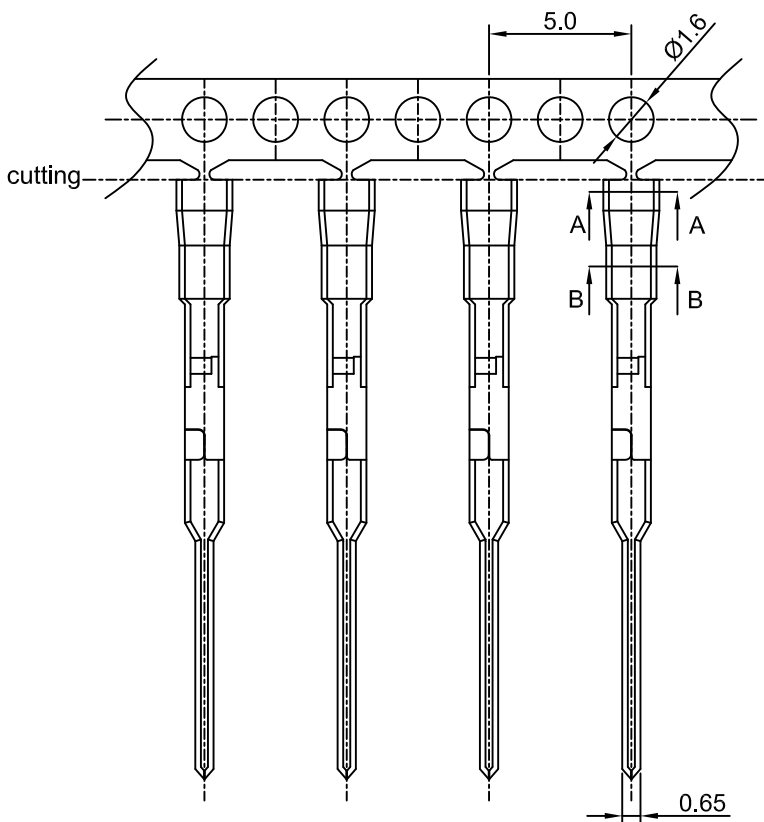

4

TOLERANCE
RANGE/公差範圍

X. ±0.30
.X ±0.25
.XX ±0.20
.XXX ±0.015

RAWN/繪圖

DATE/日期
2020.05.13

CHECK BY/審查

DATE/日期
2020.05.13

APPROVED BY/核准

DATE/日期
2020.05.13

PACKAGE/包裝

15,000 PCS / REEL



康霸子
KANGBAZ

5.0mm PITCH CONNECTOR FOR CABLE

PART NO./料號

KB4603-15K-0T(0G/HG)-MS

UNIT/單位
MM

MATERIAL/材質
PHOSPHOR BRONZE

ANGLE OF VIEW/視角

SHEET/頁碼
1 OF 1

REV/版本
A