

D

C

B

A






康霸子
KANGBAZ


RoHS

- FOR 4603 SERIES CONNECTOR
- SPECIFICATIONS
VOLTAGE RATING: 250 V AC , DC
CURRENT RATING: 2.5 A AC , DC
INSULATION RESISTANCE: 1,000 MΩ MIN
- ENVIRONMENTAL
TEMPERATURE RANGE: -25°C~+85°C
WITHSAND VOLTAGE: 800 V AC / MINUTE



- PART NO.
KB4603HLW - XXCNS
SERIES NO. MOLD NO.
NO LOGO
CONCAVE
CIRCUITS NUMBER 02 TO 15

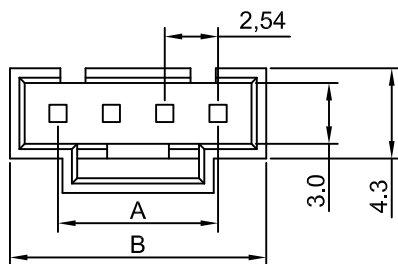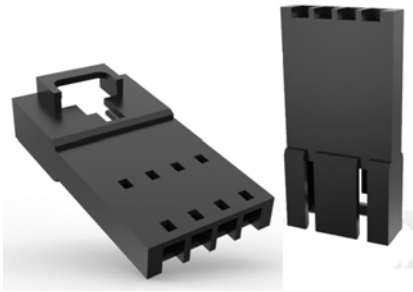

2 CIRCUIT



3 CIRCUIT

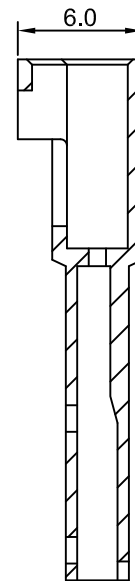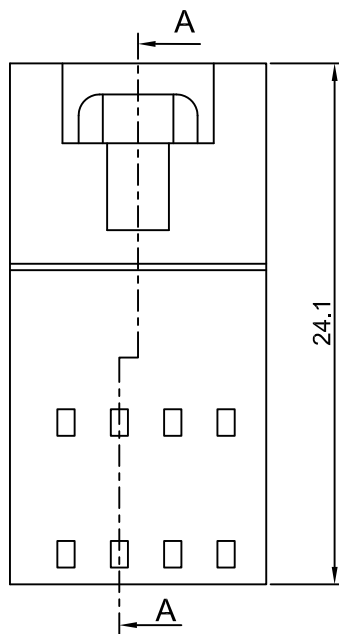

SECTION A-A

PIN NO.	A	B	PIN NO.	A	B
02	2.54	7.1	09	20.32	24.9
03	5.08	9.7	10	22.86	27.4
04	7.62	12.2	11	25.40	30.0
05	10.16	14.7	12	27.94	32.5
06	12.70	17.3	13	30.48	35.0
07	15.24	19.8	14	33.02	37.6
08	17.78	22.4	15	35.56	40.1

TOLERANCE
RANGE/公差範圍

RAWN/繪圖

DATE/日期
2020.05.13



康霸子

KANGBAZ

2.54mm PITCH HOUSING FOR FFC/FPC

STANDARD/一般公差 ±0.2

CHECK BY/審查

DATE/日期
2020.05.13

APPROVED BY/核准

DATE/日期
2020.05.13

PART NO./料號

KB4603HLW-XXCNS

UNIT/單位
MM

PACKAGE/包裝

02-06 PIN 1,000 PCS/BAG
07-15 PIN 500 PCS/BAG

MATERIAL/材質
PBT UL 94V-0

ANGLE OF VIEW/視角



PIN NUMBER/針數

02-15

REV/版本
A