

D

C

B


A



康霸子
KANGBAZ

RoHS

1

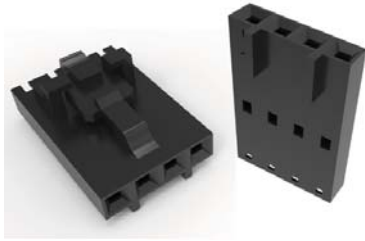

● MATED WITH KB4603 SERIES CONNECTOR

● SPECIFICATIONS

VOLTAGE RATING: 250V AC/MINUTE

CURRENT RATING: 2A. AC/DC

CONTACT RESISTANCE: 20mΩ MAX

INSULATION RESISTANCE: 1000 MΩ MIN

● ENVIRONMENTAL

TEMPERATURE RANGE: -25°C~+85°C

DIMENSION: N=CIRCUIT NO.

A=2.54*(N-1)

B=2.54*N

2

● PART NO.




KB4603HLD - XXNJ

SERIES NO.

NO LOGO.

CIRCUITS NUMBER 02 TO 20

3

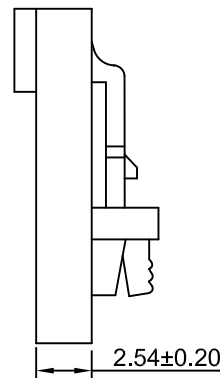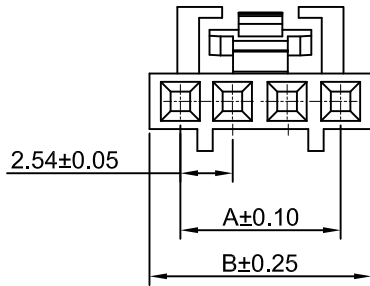

NO	A	B
02P	2.54	5.08
03P	5.08	7.62
04P	7.62	10.16
05P	10.16	12.70
06P	12.70	15.24
07P	15.24	17.78
08P	17.78	20.32
09P	20.32	22.86
10P	22.86	25.40
11P	25.40	27.94
12P	27.94	30.48
13P	30.48	33.02
14P	33.02	35.56
15P	35.56	38.10
16P	38.10	40.64
17P	40.64	43.18
18P	43.18	45.72
19P	45.72	48.26
20P	48.26	50.80

4

TOLERANCE
RANGE/公差範圍

X.X ±0.50
X.XX ±0.30
X.XXX ±0.15
ANG. ±2°

RAWN/繪圖

DATE/日期
2020.05.18

CHECK BY/審查

DATE/日期
2020.05.18

APPROVED BY/核准

DATE/日期
2020.05.18

PACKAGE/包裝

02-06PIN 1,000PCS/Bag
07-20PIN 500PCS/Bag



康霸子
KANGBAZ

2.54mm PITCH HOUSING FOR FFC/FPC

PART NO./料號

KB4603HLD-XXNJ

UNIT/單位
MM

MATERIAL/材質
PBT UL 94V-0

ANGLE OF VIEW/視角

PIN NUMBER/針數
02-20

REV/版本
A