

D

C

B

A

康霸子
KANGBAZ

RoHS

●SPECIFICATIONS:

VOLTAGE RATING: 250 VAC RMS.

CURRENT RATING: 3 AMP.

DIELECTRIC WITHSTANDING VOLTAGE:

AC 250V FOR 1 MINUTE.

INSULATION RESISTANCE: 500 MΩ.

●ENVIRONMENTAL

TEMPERATURE RANGE: -40°C~+105°C.

●PART NO.

KB4608 - 35K - 0T - SMH

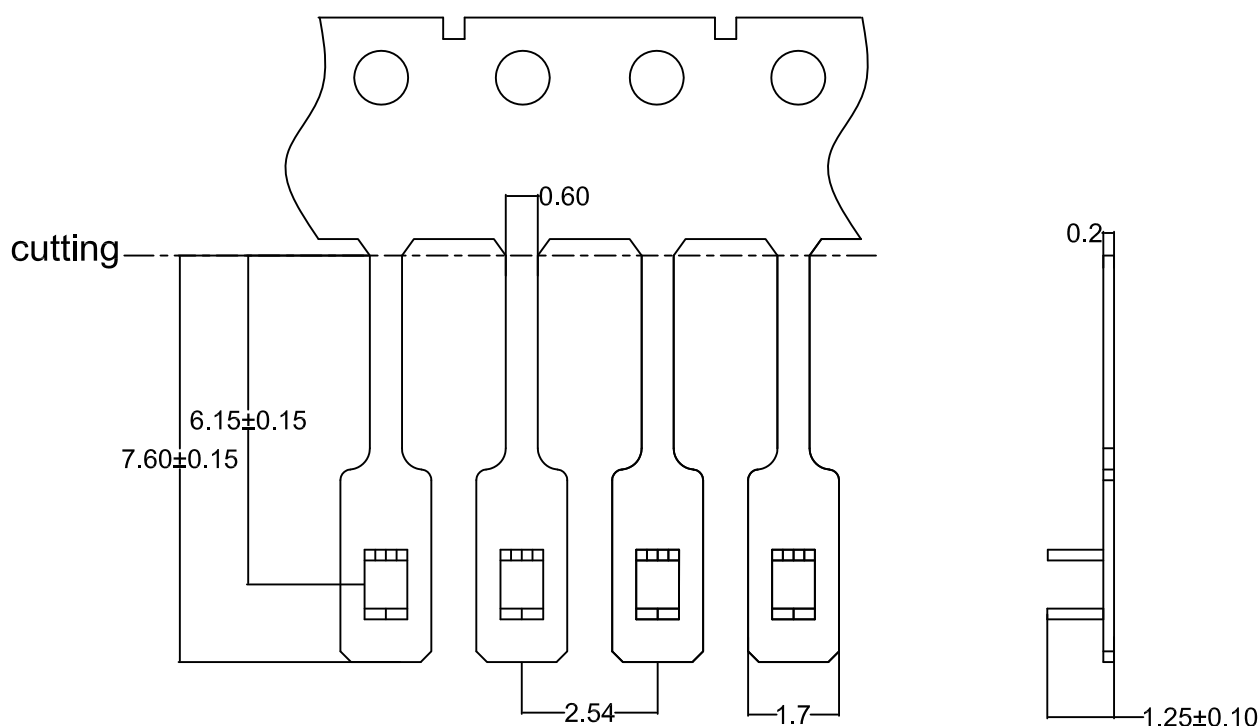
SERIES NO.

SHORT MALE.

35K/REEL.

0T: PLATED.

OTHER PLATINGS ON REQUEST.

TOLERANCE
RANGE/公差範圍

RAWN/繪圖

DATE/日期
2019.08.23康霸子
KANGBAZ

2.54mm PITCH FFC/FPC CONNECTOR

STANDARD/一般公差 ±0.2

CHECK BY/審查

DATE/日期
2019.08.23

APPROVED BY/核准

DATE/日期
2019.08.23

PART NO./料號

KB4608-35K-0T-SMH

UNIT/單位
MM

PACKAGE/包裝

30,000 PCS / REEL

MATERIAL/材質
PHOSPHOR BRONZEANGLE OF VIEW/視角
SHEET/頁碼
1 OF 1REV/版本
A