

D

C

B

A



康霸子
KANGBAZ

RoHS

●FOR KB46 SERIES HOUSING

●SPECIFICATIONS:

VOLTAGE RATING: 250 VAC RMS.

CURRENT RATING: 3 AMP.

DIELECTRIC WITHSTANDING VOLTAGE:

AC 250V FOR 1 MINUTE.

INSULATION RESISTANCE: 500 MΩ.

●ENVIRONMENTAL

TEMPERATURE RANGE: -40°C~+105°C.

●PART NO.

KB4608 - 30K - 0T(0G) - F

SERIES NO.




FEMALE.

30K/REEL.

0T: PLATED.

0G: PLATED.

OTHER PLATINGS ON REQUEST.

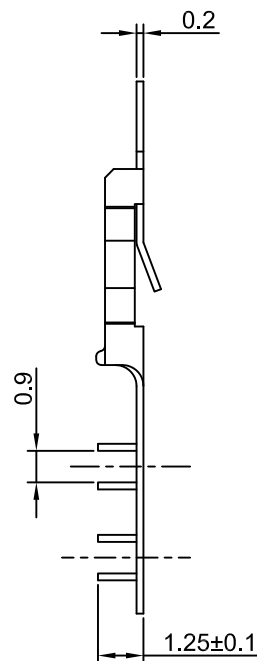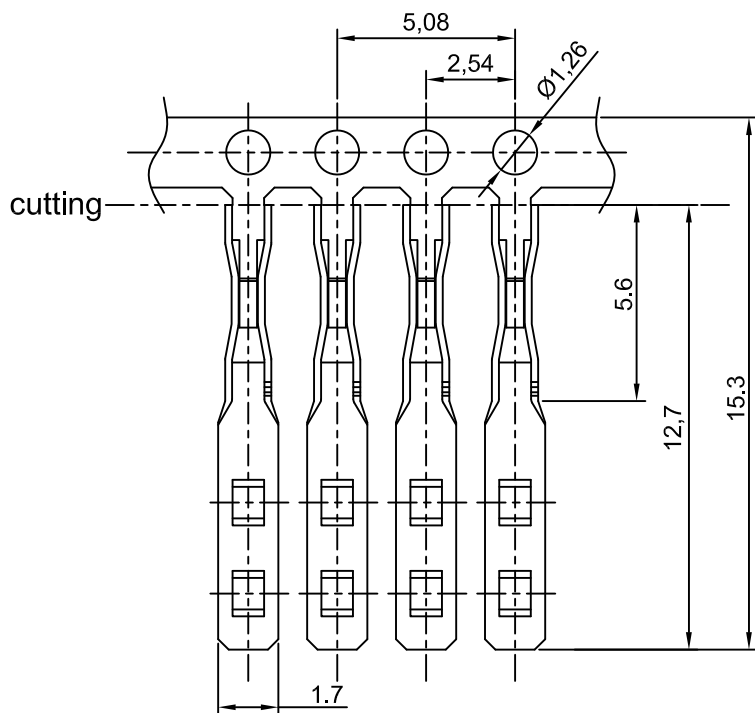

TOLERANCE
RANGE/公差範圍

RAWN/繪圖

DATE/日期
2019.08.23



康霸子
KANGBAZ

2.54mm PITCH FFC/FPC CONNECTOR

CHECK BY/審查

DATE/日期
2019.08.23

STANDARD/一般公差 ±0.2

APPROVED BY/核准

DATE/日期
2019.08.23

PART NO./料號

KB4608-30K-0T(0G)-F

UNIT/單位
MM

PACKAGE/包裝

30,000 PCS / REEL

MATERIAL/材質
PHOSPHOR BRONZE

ANGLE OF VIEW/視角

SHEET/頁碼
1 OF 1

REV/版本
A