

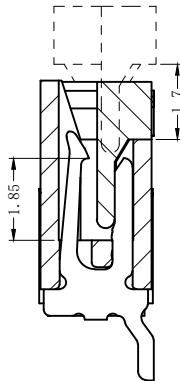
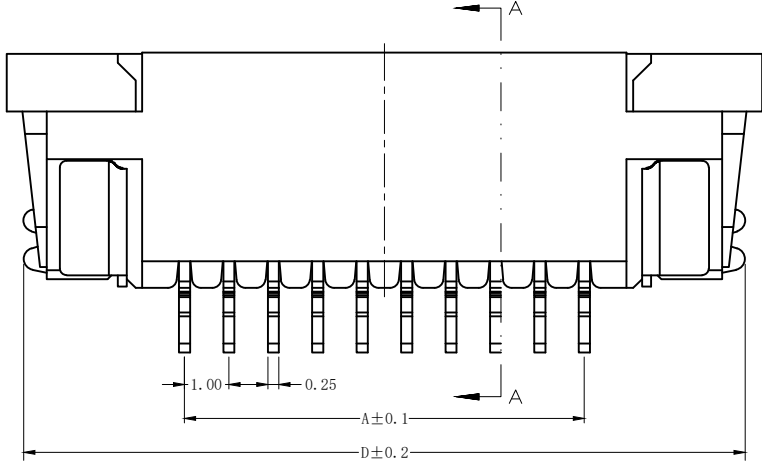
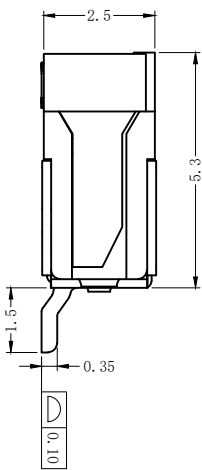
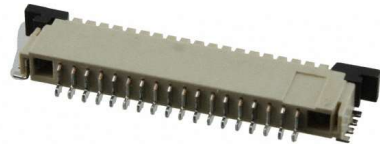
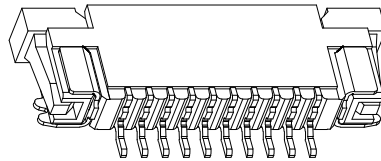
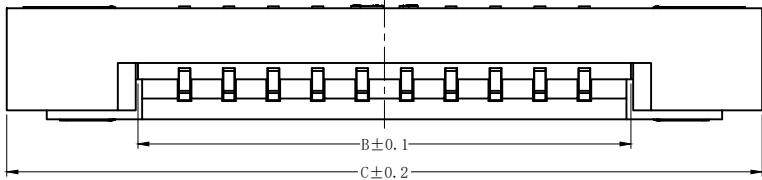


R o H S

REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING	22. 12. 01	Jenply

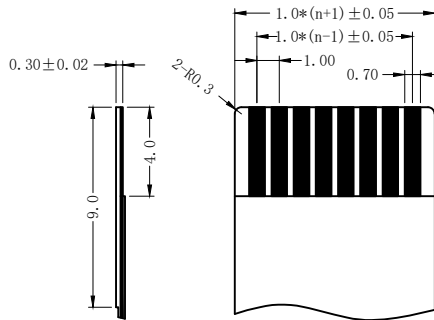

SECTION A—A

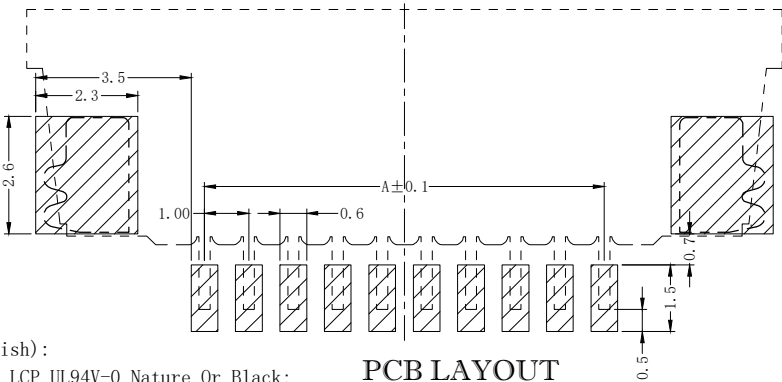

PROPER CABLE (SCALE 2:1)

孔位	A	B	C	D
4	3.00	5.15	11.10	10.20
5	4.00	6.15	12.10	11.20
6	5.00	7.15	13.10	12.20
7	6.00	8.15	14.10	13.20
8	7.00	9.15	15.10	14.20
9	8.00	10.15	16.10	15.20
10	9.00	11.15	17.10	16.20
11	10.00	12.15	18.10	17.20
12	11.00	13.15	19.10	18.20
13	12.00	14.15	20.10	19.20
14	13.00	15.15	21.10	20.20
15	14.00	16.15	22.10	21.20
16	15.00	17.15	23.10	22.20
17	16.00	18.15	24.10	23.20
18	17.00	19.15	25.10	24.20
19	18.00	20.15	26.10	25.20
20	19.00	21.15	27.10	26.20
21	20.00	22.15	28.10	27.20
22	21.00	23.15	29.10	28.20
23	22.00	24.15	30.10	29.20
24	23.00	25.15	31.10	30.20
25	24.00	26.15	32.10	31.20
26	25.00	27.15	33.10	32.20
27	26.00	28.15	34.10	33.20
28	27.00	29.15	35.10	34.20
29	28.00	30.15	36.10	35.20
30	29.00	31.15	37.10	36.20
31	30.00	32.15	38.10	37.20
32	31.00	33.15	39.10	38.20
33	32.00	34.15	40.10	39.20
34	33.00	35.15	41.10	40.20
35	34.00	36.15	42.10	41.20
36	35.00	37.15	43.10	42.20

技术要求 (Technical Index):

- 材质与表面处理 (Material And Finish):
基座 (Housing) 和 盖子 (Cover): LCP UL94V-0 Nature Or Black;
端子 (Terminal): Phosphor Copper Au/Sn Plated;
焊片 (Solder): Copper Alloy Au/Sn Plated;
- 工作温度 (Temperature range): -25° C~+85° C.
- 额定电压 (Rated voltage): 50V, AC/DC.
- 额定电流: 0.5A, AC/DC.
- 接触电阻 (Contact resistance): ≤20mΩ.
- 绝缘电阻 (Insulation resistance): ≥800MΩ.
- 耐电压 (Withstanding Voltage): 500V AC/minute.

PCB LAYOUT
TOLERANCE:±0.05

DESIGN:		Jenply		KANGBAZ 康霸子									
CHECK:		Ke Tian											
APPROVED:		Youquan Xu		TITLE:									
DIM	TOL	DIM	TOL	1.0mm FPC (E型)半包上接(H=2.5)									
X.	±0.25			PART NO.									
X.X	±0.20	X° .	±3.0°	KBF1.0-xxESPWB									
X.XX	±0.15	X.X°		REV. A		SCALE: N/A		UNIT: mm		SHEET: 1/1			
X.XXX		X.XX°											
		X.XXX°											