










康霸子
KANGBAZ

RoHS

- Specifications:
Operating Voltage:50V
Current Rating: 0.5A
Withstand Voltage: 200V
Contact Resistance:30mΩ
Insulation resistance:500MΩ
Operating Temperature:-25°C~+85°C
- PART NO.

KBF0.5 - XXSBBLRJ

MOULD NO.
REEL
PREMO -FLEX
FLIP LOCK
HORIZONTAL BOTTOM CONTACT
SMT
CIRCUITS NUMBER 04 TO 80
0.5 mm SPACING
FFC CONNECTOR

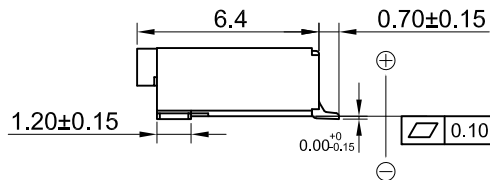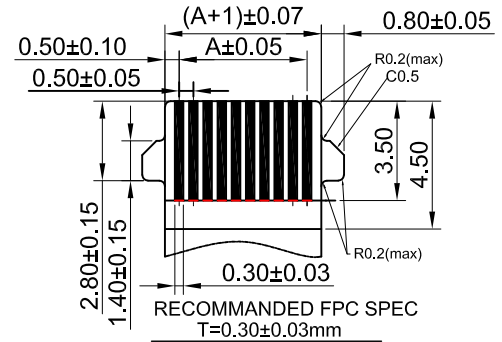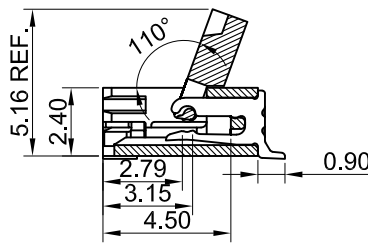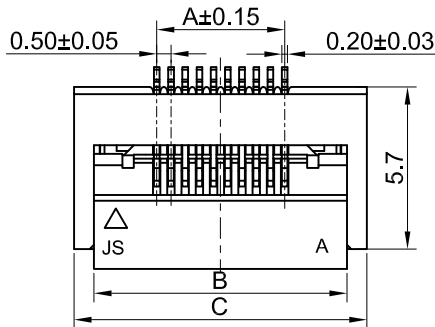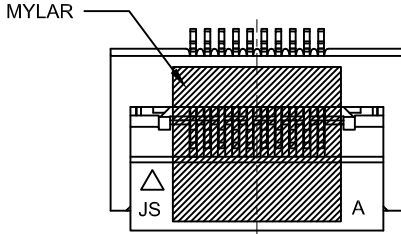

孔位	A	B	C	D	孔位	A	B	C	D
4	1.5	5.4	6.8	2.6	34	16.5	20.4	21.8	17.6
5	2.0	5.9	7.3	3.1	35	17.0	20.9	22.3	18.1
6	2.5	6.4	7.8	3.6	36	17.5	21.4	22.8	18.6
7	3.0	6.9	8.3	4.1	37	18.0	21.9	23.3	19.1
8	3.5	7.4	8.8	4.6	38	18.5	22.4	23.8	19.6
9	4.0	7.9	9.3	5.1	39	19.0	22.9	24.3	20.1
10	4.5	8.4	9.8	5.6	40	19.5	23.4	24.8	20.6
11	5.0	8.9	10.3	6.1	41	20.0	23.9	25.3	21.1
12	5.5	9.4	10.8	6.6	42	20.5	24.4	25.8	21.6
13	6.0	9.9	11.3	7.1	43	21.0	24.9	26.3	22.1
14	6.5	10.4	11.8	7.6	44	21.5	25.4	26.8	22.6
15	7.0	10.9	12.3	8.1	45	22.0	25.9	27.3	23.1
16	7.5	11.4	12.8	8.6	46	22.5	26.4	27.8	23.6
17	8.0	11.9	13.3	9.1	47	23.0	26.9	28.3	24.1
18	8.5	12.4	13.8	9.6	48	23.5	27.4	28.8	24.6
19	9.0	12.9	14.3	10.1	49	24.0	27.9	29.3	25.1
20	9.5	13.4	14.8	10.6	50	24.5	28.4	29.8	25.6
21	10.0	13.9	15.3	11.1	51	25.0	28.9	30.3	26.1
22	10.5	14.4	15.8	11.6	52	25.5	29.4	30.8	26.6
23	11.0	14.9	16.3	12.1	53	26.0	29.9	31.3	27.1
24	11.5	15.4	16.8	12.6	54	26.5	30.4	31.8	27.6
25	12.0	15.9	17.3	13.1	55	27.0	30.9	32.3	28.1
26	12.5	16.4	17.8	13.6	56	27.5	31.4	32.8	28.6
27	13.0	16.9	18.3	14.1	57	28.0	31.9	33.3	29.1
28	13.5	17.4	18.8	14.6	58	28.5	32.4	33.8	29.6
29	14.0	17.9	19.3	15.1	59	29.0	32.9	34.3	30.1
30	14.5	18.4	19.8	15.6	60	29.5	33.4	34.8	30.6
31	15.0	18.9	20.3	16.1	64	31.5	35.4	36.8	32.6
32	15.5	19.4	20.8	16.6	68	33.5	37.4	38.8	34.6
33	16.0	19.9	21.3	17.1	80	39.5	43.4	44.8	40.6

TOLERANCE
RANGE/公差範圍

STANDARD/
X. ±0.5
.X ±0.3
.XX ±0.2

RAWN/繪圖

DATE/日期
2024.01.22

CHECK BY/審查

DATE/日期
2024.01.22

APPROVED BY/核准

DATE/日期
2024.01.22

PACKAGE/包裝

REEL



康霸子
KANGBAZ

FPC1.0mm PITCH BOTTOM OF CONTACT SMT

PART NO./料號

KBF0.5-XXSBBLRJ

MATERIAL/材質
THERMOPLASTIC

ANGLE OF VIEW/視角

PIN NUMBER/針數
04-80

UNIT/單位
MM
REV/版本
A