D C B A

康霸子 KANGBAZ

RoHS

1

2

3

4

●SPECIFICATIONS:

VOLTAGE RATING: 250 VAC RMS.

CURRENT RATING: 3 AMP.

DIELECTRIC WITHSTANDING VOLTAGE:

AC 250V FOR 1 MINUTE.

INSULATION RESISTANCE: 500 MΩ.

●ENVIRONMENTAL

TEMPERATURE RANGE: -40°C~+105°C.

●PART NO.

KB4612 - 30K - 0T - ML

SERIES NO.

30K/REEL.


MALE.


0T: PLATED.
OTHER PLATINGS ON REQUEST.


section A-A



section B-B



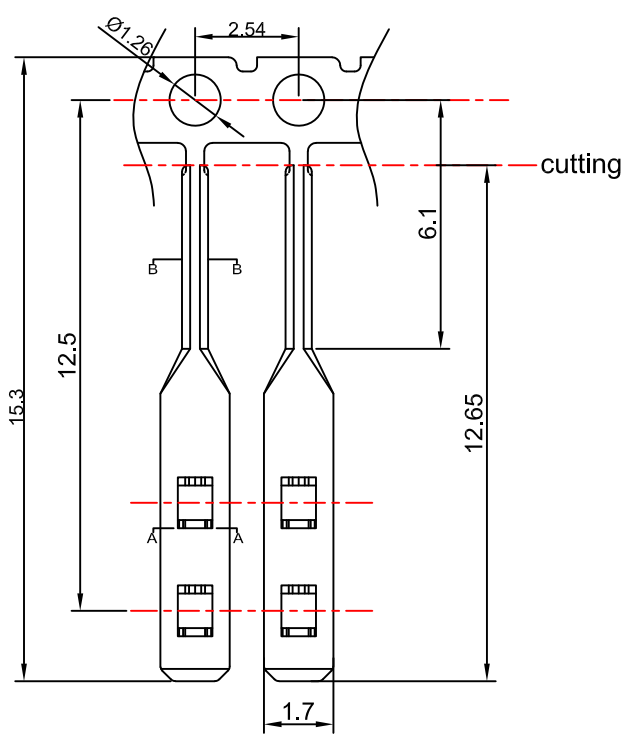

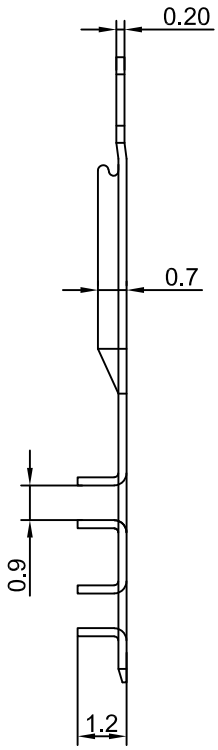

TOLERANCE RANGE/公差範圍	RAWN/繪圖	DATE/日期 2019.08.23	康霸子 KANGBAZ	2.54mm PITCH FFC/FPC CONNECTOR		
STANDARD/一般公差 ±0.2	CHECK BY/審查	DATE/日期 2019.08.23				
	APPROVED BY/核准	DATE/日期 2019.08.23	PART NO./料號 KB4612-30K-0T-ML			UNIT/單位 MM
	PACKAGE/包裝	30,000 PCS / REEL	MATERIAL/材質 PHOSPHOR BRONZE	ANGLE OF VIEW/視角	SHEET/頁碼 1 OF 1	REV/版本 A