

D

C

B

A



康霸子
KANGBAZ

RoHS

- FOR KB4607 SERIES CONNECTOR
- SPECIFICATIONS
 - VOLTAGE RATING: 250 VAC RMS.
 - CURRENT RATING: 2A.
 - INSULATION RESISTANCE: 500 MΩ MIN.
- ENVIRONMENTAL
 - TEMPERATURE RANGE: -25°C~+85°C.



- PART NO





KB4607HLA - XXNH

SERIES NO.

MOLD NO.

NO LOGO.

CIRCUITS NUMBER 04 TO 30

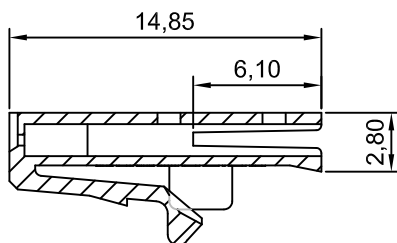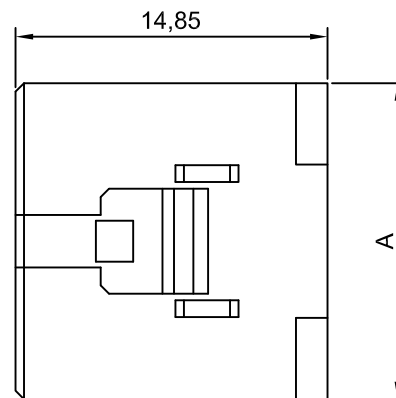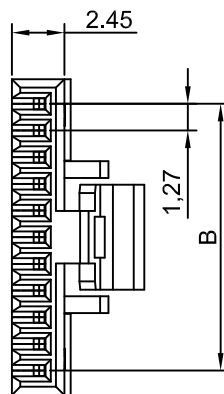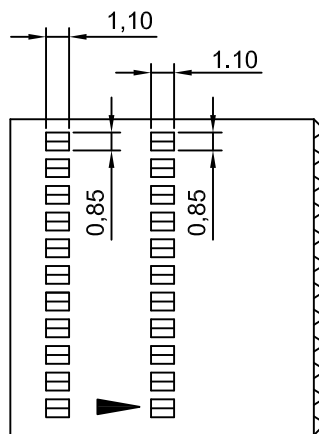

PIN NO.	A	B	PIN NO.	A	B	PIN NO.	A	B
04	6.15	3.81	13	17.58	15.24	22	29.01	26.67
05	7.42	5.08	14	18.85	16.51	23	30.28	27.94
06	8.69	6.35	15	20.12	17.78	24	31.55	29.21
07	9.96	7.62	16	21.39	19.05	25	32.82	30.48
08	11.23	8.89	17	22.66	20.32	26	34.09	31.75
09	12.50	10.16	18	23.93	21.59	27	35.36	33.02
10	13.77	11.43	19	25.20	22.86	28	36.63	34.29
11	15.04	12.70	20	26.47	24.13	29	37.90	35.56
12	16.31	13.97	21	27.74	25.40	30	39.17	36.83

TOLERANCE
RANGE/公差範圍

RAWN/繪圖

DATE/日期
2019.07.09



康霸子
KANGBAZ

1.27mm PITCH FFC/FPC CONNECTOR

STANDARD/一般公差 ±0.2

CHECK BY/審查

DATE/日期
2019.07.09

APPROVED BY/核准

DATE/日期
2019.07.09

PART NO./料號

KB4607HLA-XXNH

UNIT/單位
MM

PACKAGE/包裝

04-06 PIN 1,000 PCS/BAG
07-30 PIN 500 PCS/BAG

MATERIAL/材質
NY66

ANGLE OF VIEW/視角



PIN NUMBER/針數
4-30

REV/版本
A

1

2

3

4